

Oval Gear Flowmeter

for Low and High Viscosity Liquids



measuring
•
monitoring
•
analyzing

DON



ATEX



- Measuring Range: 0.13 ... 9.5 GPH to 40 ... 660 GPM
- Viscosity Range: up to 1000 cP (Higher upon Request)
- Accuracy: $\pm 0.2\% \dots 1\%$ of Reading
- Material: Aluminum or Stainless Steel
- p_{max} : 1450 PSI; t_{max} : 300 °F
- Pulse Output, LCD Display, 4...20 mA, Alarms, Mechanical Totalizer



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECH REPUBLIC, EGYPT, FRANCE, GERMANY, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, UNITED KINGDOM, USA, VIETNAM

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205
Main Office:
1.800.998.1020
1.412.788.4890
info@koboldusa.com
www.koboldusa.com




Description

Oval gear flowmeters are categorized as positive displacement flow technology. When liquid flows through this type of positive displacement flowmeter, two oval geared rotors measure a constant volume per rotation within a precisely machined measuring chamber. With each rotation, a constant volume of liquid is measured. The rotation of the oval gears is sensed via magnets embedded within the rotors. These magnets transmit a high resolution pulse output. The output signal can be processed externally via a remote display controller or PLC or via a variety of output/display options available as accessories attached to the flowmeters.

Operation:

Liquid travels around the crescent shaped chambers created by the rotational movement of the rotors

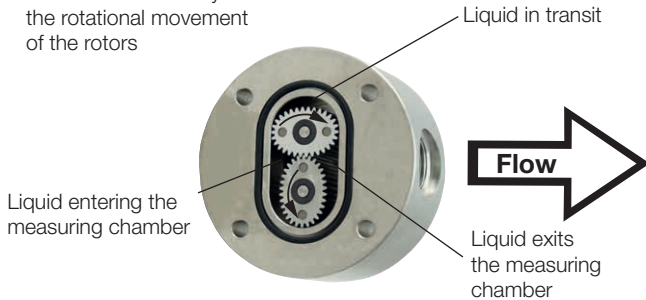

The positive displacement flow technology allows for precise flow measurement of most clean liquids regardless of the media's conductivity. Other liquid properties also have a minimal effect on the performance of this type of meter. Flow profile conditioning is not required, as with alternative flow technology options, making oval gear installations simple to install in tight spaces and at a economical price.

Areas of Application

Suitable for viscous, non abrasive, clean liquids like:

- Petroleum • Oil • Chemicals • Grease
• Fuels • Ink • Pastes

Aluminum body meters are compatible with fuels, fuel oils, & other lubricating liquids. In addition to lubricating media, stainless steel flowmeters are suitable for most products and chemicals.

Technical Data

Materials

DON-1

Body: Aluminum
Gears: PPS GF30/PTFE, PEEK
Axles: 316L Stainless Steel

DON-2

Body
DON-x04 ... DON-x15: 316L Stainless Steel
DON-x20 ... DON-x60: 316L/301* Stainless Steel

Gears

DON-x04 ... DON-x40: 316L Stainless Steel
DON-x45 ... DON-x60: 301* Stainless Steel

Bearing:

Carbon Graphite

Axles:

316L Stainless Steel

* Closest AISI Equivalent to 1.3955 Stainless Steel

Materials (Continued)

DON-8

Body

DON-x04... DON-x15: 316L Stainless Steel
DON-x20 ... DON-x60: 316L/301* Stainless Steel

Gears:

PPS GF30/PTFE, PEEK

Axles:

316L Stainless Steel

O-Rings (Media Temperature Limits)

FKM: -4... 300 °F

NBR: -4... 212 °F

FEP with EPDM/FKM core: 5... 266 °F

(only for DON-x04...DON-x40)

Fluoroprene®:

Acc. to Regulation (EC) No. 1935/2004

Electrical Cover (for Cable Connection)

Standard: Polyamide PA6 GF35 UL94 HB/VO

Optional: 316L Stainless Steel

Cable Entry:

M20 x 1.5 or 1/2" NPT Adapter

Magnet Encapsulation

DON-x04... DON-x10: PEEK

DON-x15... DON-x60: 316L Stainless Steel

Screw Material

for Aluminum Housing:

Stainless Steel (Standard)
Steel Coated with GEOMET® 321
(for DON-225 and DON-825)

for Stainless Steel Housing:

Stainless Steel (Standard)
Steel Coated with GEOMET®321
(optional) for Higher Pressure Rating
(See Order Details)

Accuracy**

DON-x04: ± 3% of Reading (0.13...0.95 GPH),
± 1% of Reading (0.95...9.5 GPH)

DON-x05...DON-x15: ± 1% of Reading

DON-x20...DON-x60

SS Rotors:

± 0.5% of Reading;
± 0.2% of Reading w/ Optional Z3/E3
Electronics w/ Linearization Function

PPS Rotors:

± 1% of Reading;
± 0.5% of Reading w/ Optional Z3/E3
Electronics w/ Linearization Function

Option M4:

± 1% of Reading (Better Accuracy for
higher viscosities on request)

Additional Max. Inaccuracy

for Analog Outputs:

± 0.15% of Full Scale

Repeatability:

± 0.03 % Typical

Protection Class:

IP 66/67 (IP 65 for M4)

Media Temperature

Options ..Lx, ..Zx, ..M4: -4...176 °F

DON-1 /DON-8 : -4...176 °F

DON-2 w/ Pulse Out and

Option ..Zx w/ Cooling Fins: -4...250 °F

Option ..T0: -4...300 °F

Models with

PPS/PEEK Rotors: Max. 176 °F

Ambient Temperature:

-4 ... 176 °F

Option M4:

32...140 °F

** Reference Conditions: DON-x10...x60 (Calibration Oil, 4.6 cSt, 77 °F, 14 PSIG)
DON-x04, DON-x05 and DON-x15 for higher viscosities
(Calibration Oil, 10 cSt, 68 °F, 14 PSIG)
Accuracy data is valid for given viscosities and higher



ATEX - Approval

(Options E1/E2/E3/E5): Ex II 2G Ex ia IIC T4 Gb (-20 °C ≤ Ta ≤ +60 °C)
 (Options HE, DE, BE, KE, GE, LE, RE): Ex II 2G Ex db IIC T4/T6 Gb
 Ex I M2 Ex db I Mb

IECEX - Approval

(Options E1/E2/E3/E5): Ex ia IIC T4 Gb
 (Options HE, DE, BE, KE, GE, LE, RE): Ex db IIC, Ex db I Mb

Maximum Pressure (Threaded Models)

| Model | Maximum Pressure (PSI) | | | |
|---------|------------------------|---------|-------------------|---------------------|
| | DON-1 | DON-2/8 | DON-1 (Option-M4) | DON-2/8 (Option-M4) |
| DON-x04 | 925 | 1450 | - | - |
| DON-x05 | | | - | - |
| DON-x10 | | | - | - |
| DON-x15 | | | - | - |
| DON-x20 | | 1000* | 580 | 580 |
| DON-x25 | 870* | | | |
| DON-x30 | 580 | 725 | 435 | 435 |
| DON-x35 | | | | |
| DON-x40 | 230 | 230 | 230 | 230 |
| DON-x45 | | | | |
| DON-x50 | | | | |
| DON-x55 | | | | |
| DON-x60 | | | | |

With flanges: Maximum pressure rating as above or as per flange rating, whichever is lower.

* Max pressure of 1450 psi possible with steel screws (see order details)

Output Types

Reed Switch Pulse Output (..R0/RE)

The reed switch output is a two wire, normally open, SPST, voltage free contact ideal for installations without power or for use in hazardous area locations where Intrinsically Safe (I.S.) is required.

Note: when using the reed switch output, the liquid temperature must not change at a rate greater than 18 °F per minute.

Average switching life of reed contact (MTTF):

Max. Load (100 V / 10 mA) 5×10^5 switching cycles

Min. Load (<5 V / 10 mA) 5×10^8 switching cycles

Power supply: max. $30 V_{DC}$, max. 200 mA

Hall Sensor Pulse Output (..H0/HE)

In the electronics options H0/HE, a Hall Effect sensor is combined with an active push-pull output. The signal output is actively switched either to +Vs or to ground. No additional external circuit is required (e.g. pull-up resistor). The "high" signal is approximately equal to the supply voltage +Vs and the "low" signal is approximately 0 V. The electronic utilizes a 3-wire connection with an external supply voltage of 8...30 V_{DC} . The electrical load may be optionally connected to the supply voltage or to GND. Maximum output current (current source or sink): 100 mA (short circuit protected). In addition to the Hall sensor, this option is equipped with a Reed switch which works the same as option R0/RE.

Hall Sensor Pulse Output (..HU)

Like option H0, except an NPN output in place of the push-pull output and a supply voltage of 5-30 V_{DC} .

Hall Sensor Pulse Output, (..B0/BE)

Like options H0/HE; however with bipolar sensors and alternating polarized magnets. This option is used for pulsating flow, but is not equipped with a Reed switch and has half the k-factor value as compared to H0/HE.

High-Resolution Hall Sensor Pulse Output, (..G0/GE, ..K0/KE)

Like options H0/HE; the models DON-x05 and DON-x10 can be supplied with four times the pulse count per volume unit (..G0/GE) and models DON-x05, DON-x10 and DON-x15 with double the amount of pulses (..K0/KE) (see table «Output Pulse Resolution» on the following pages).

Quadrature Hall Effect Pulse Output (..D0/DE)

The DON with option D0/DE provides two independent Hall sensors. They are arranged to give separate outputs out of phase with one another.

The QUAD output is mostly suitable for detecting bidirectional flows (detection of flow direction) or where a redundant signal is desirable. Maximum output current per channel (current source or sink): 100 mA (short circuit protected).

Analog Output (..L0/LE)

The options L0 and LE (Ex) are available with a loop-powered 4-20 mA output. The loop must be powered with an external, 16...32 V_{DC} power supply. The maximum resistance of the series loads (PLC analog input/display electronics) depends on the magnitude of the supply voltage and can be calculated as follows:

$$\text{Max. load [Ohm]} = (+Vs - 9 V_{DC}) / 0.02 \text{ A } [\Omega]$$

$$\text{Example: } +Vs = 32 V_{DC} \Rightarrow \text{max. load} = 1150 \Omega$$

$$+Vs = 16 V_{DC} \Rightarrow \text{max. load} = 350 \Omega$$

The load can be inserted at any point in the current loop, observing correct polarity.

Mechanical Totalizer (..M4)

The DON-x20.. through DON-x60.. are available with a 4-digit resettable totalizer and indication of accumulated total value. The motion of the rotors is transmitted to the mechanical register totalizer via an interfacing reduction gear train and dynamic seal assembly. Option M4 is also optionally available in liters.

| | |
|----------------|--|
| Body Material: | Enameled Die-cast Aluminum, Powder-coated |
| Protection: | IP 65 |
| Ambient Temp: | 32...140 °F |
| Media Temp: | -4...176 °F |

Recommended Filter (for example model MFR-DO..):

DON-x04 ... DON-x15 < 75 μm (200 mesh)
 DON-x20 ... DON-x35 < 150 μm (100 mesh)
 DON-x40 ... DON-x60 < 350 μm (45 mesh)



Oval Gear Flowmeter Model DON

Electronic with LCD Display


| Model | ..Z1 | ..Z2 | ..Z3 | Z5 | ..ZE | ..ZB | ..E1 | ..E2 | ..E3 | ..E5 |
|---|---------------------------------|-------------------------|------------------------|--------------------|------------------------|----------------|--|------------------------------|----------------|------------------------------|
| Function | Dual Totalizer | Batching Unit | Rate/Totalizer | | | Dual Totalizer | Batching Unit | Rate/Totalizer | Rate/Totalizer | |
| Power Supply | | | | | | | | | | |
| External | 5 - 28 V _{DC} | 12 - 28 V _{DC} | 5 - 28 V _{DC} | | 9 - 28 V _{DC} | - | $U_i = 28\text{ V}$ $I_i = 100\text{ mA}$ $P_i = 0.7\text{ W}$ | | | |
| Battery-Operation (Outputs Inactive) ²⁾ | yes | no | yes | no | yes | yes | yes | no | yes | no |
| Battery Included in Shipment ³⁾ | yes | - | yes | - | yes | yes | yes | - | yes | - |
| LCD Display | | | | | | | | | | |
| Selectable Units | yes | yes | yes | yes | yes | yes | yes | yes | yes | yes |
| Decimal Point | yes | yes | yes | yes | yes | yes | yes | yes | yes | yes |
| Accumulative Total | yes | yes | yes | yes | yes | yes | yes | yes | yes | yes |
| Resettable Total | yes | yes | yes | yes | yes | yes | yes | yes | yes | yes |
| Linearization | yes | no | yes | yes | yes | yes | yes | no | yes | yes |
| Rate Display | yes | yes | yes | yes | yes | yes | yes | yes | yes | yes |
| Backlighting | yes | yes | yes | yes | yes | no | no | no | no | no |
| Input | | | | | | | | | | |
| Sensors | Hall Sensor/Reed Switch | | | | | Reed Switch | | | | |
| Outputs | | | | | | | | | | |
| 4-20 mA | no | no | yes | yes | no | no | no | no | yes | yes |
| Flow Rate Alarm Min./Max. | no | no | NPN/PNP/ Push-Pull | NPN/PNP/ Push-Pull | no | no | no | no | no | with Solid State Relay Board |
| Batch End & Control | no | yes | no | no | no | no | no | yes | no | no |
| Pulse Output | no | no | Push-Pull | Push-Pull | Push-Pull | no | no | no | no | with Solid State Relay Board |
| 2 x SPDT Relays ¹⁾ | no | yes | no | yes | no | no | no | with Solid State Relay Board | no | |
| Installation | | | | | | | | | | |
| IP 65 | yes | yes | yes | yes | IP 66/67 | IP 66/67 | yes | yes | yes | yes |
| Cable Entries | M20x1.5 or ½" NPT | | | | | | | | | |
| Media Temperature Range (Cooling Fin Option: max. 250 °F) | -4...176 °F | | | | | | | | | |
| Ambient Temperature Range | -4...176 °F | | | | | 32...140 °F | | | | |
| Housing Material | PA6 GF35 UL94 HB/VO/PC UL94 V-2 | | | | | | | | | |
| ATEX Approval | no | | | | | yes | | | | |

¹⁾ Replaces solid state outputs, for details see ZOK Datasheet


²⁾ Battery operation only acceptable with reed switch sensor "Rx"

³⁾ Options Z5, Z6, Z7, Z8, and Z9 are shipped without batteries

DON Pressure Drop Versus Viscosity Curves

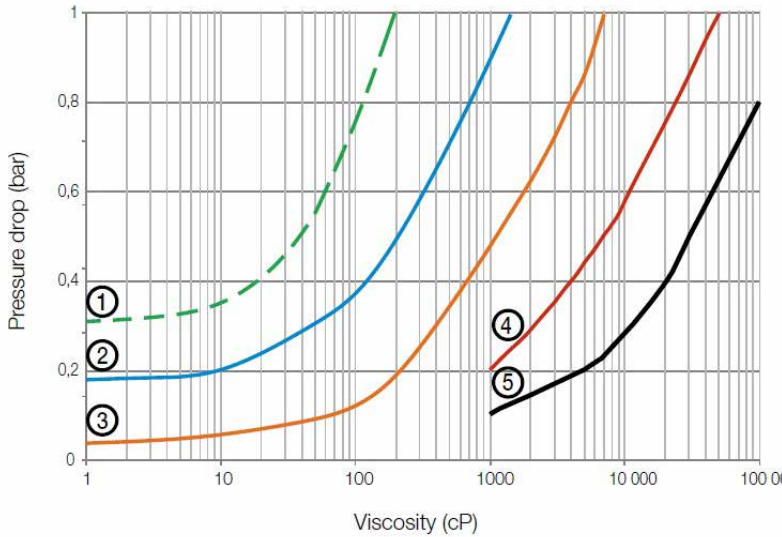

- ① Standard Rotors 100 % of Full Scale
- ② Standard Rotors 50 % of Full Scale
Special Cut Rotors 100 % of Full Scale
- ③ Standard Rotors 25 % of Full Scale
Special Cut Rotors 50 % of Full Scale
- ④ Special Rotors 25 % of Full Scale
- ⑤ Special Rotors 10 % of Full Scale

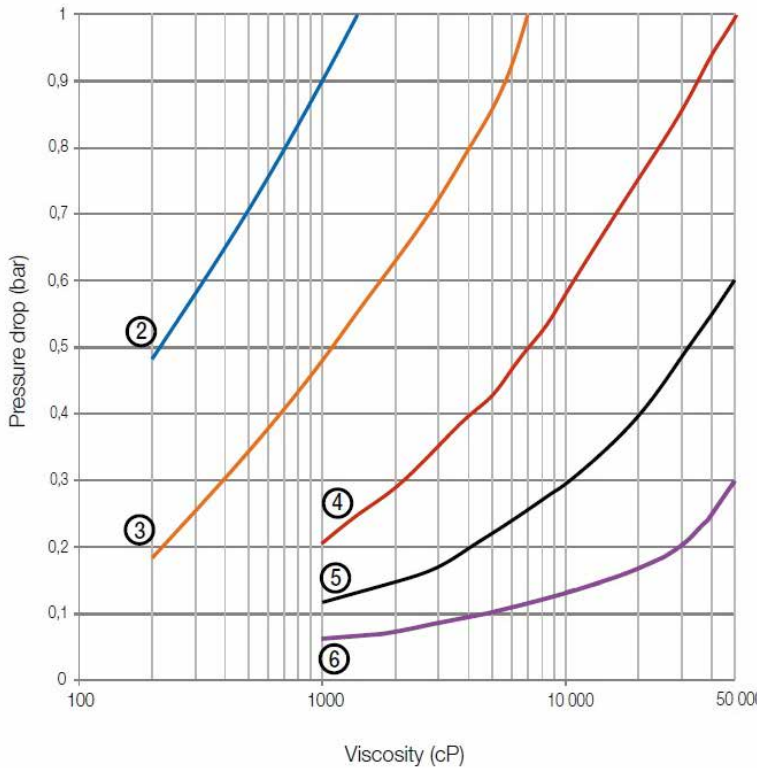

- ② Standard Rotors 50 % of Full Scale
Special Cut Rotors 100 % of Full Scale
- ③ Standard Rotors 25 % of Full Scale
Special Cut Rotors 50 % of Full Scale
- ④ Special Cut Rotors 25 % of Full Scale
- ⑤ Special Cut Rotors 10 % of Full Scale
- ⑥ Special Cut Rotors 5 % of Full Scale

Pressure Drop Limit Versus Flowrate

The curves above represent the pressure drop for standard cut oval rotors. Special cut rotors, option "Y" have alternate tooth relief which effectively reduces the pressure drop by 50%. When sizing a meter, be sure your selection falls below the 1 bar (14.5 PSI) maximum allowable pressure drop line on the graph.



Maximum Flowrate Multiplier (for Higher Viscosities)

| Viscosity (cPs) | Standard Rotor | Special Cut Rotor |
|-----------------|----------------|-------------------|
| ≤ 1,000 | 1 | 1 |
| ≤ 2,000 | 0.5 | 1 |
| ≤ 4,000 | 0.42 | 0.84 |
| ≤ 6,000 | 0.33 | 0.66 |
| ≤ 8,000 | 0.25 | 0.5 |
| ≤ 30,000 | 0.15 | 0.3 |
| ≤ 60,000 | 0.12 | 0.25 |
| ≤ 150,000 | 0.1 | 0.2 |
| ≤ 250,000 | 0.05 | 0.1 |
| ≤ 1,000,000 | 0.025 | 0.05 |

Noise Level (in dB) at Full Scale

| Size | PPS Gears | SS Gears |
|------|-----------|----------|
| x25 | 83 | 91 |
| x30 | 84 | 93.1 |
| x35 | 83.5 | 95 |
| x40 | 85.4 | 96 |
| x45 | 87.5 | 98 |
| x50 | 86.1 | 99.4 |
| x55 | 86.1 | 98.1 |
| x60 | 85 | 99 |

Special Cut Rotors for Higher Viscosities

For viscosities > 1000 cP, special cut rotors (option: "Y") are normally required to keep the maximum pressure drop from exceeding acceptable levels. This option applies to DON-x15 and larger sizes. For higher viscosities, the flowmeter max. flowrate is derated according to the table above. At viscosities < 1000 cP these special rotors are less accurate
 Example:

DON-x25G measuring viscous oil at 8000 cP:
 max. flow of 40 GPM x 0.5 = 20.0 GPM new max. flow rate.

Information Required for Order:

To ensure proper operation, this product requires a completed application guide form to be submitted with any order. Please refer to the 'documentation' tab on the bottom of the product page for this product on our website in order to obtain the correct form. You can also contact your KOBOLD representative for this form.

Nominal Output Pulse Resolution*

| Model | Flow Range (GPM) | Pulse per Gallon | | | | | |
|---------|------------------|------------------|----------------|----------------|---------------------------|---------------------------------|---------------------------------|
| | | Reed Switch Rx | Hall Sensor Hx | Hall Sensor Bx | Quadrature-Hall Sensor Dx | Hall Sensor, High-Resolution Gx | Hall Sensor, High-Resolution Kx |
| DON-x04 | 0.13...9.5 GPH | 10107 | 10107 | --- | 10107 | 42851 | 20214 |
| DON-x05 | 0.13...9.5 GPH | 10107 | 10107 | --- | 10107 | 42851 | 20214 |
| DON-x10 | 0.5...27 GPH | 4020 | 4020 | --- | 4020 | 16080 | 8040 |
| DON-x15 | 4...145 GPH | 1329 | 2657 | 1329 | 2657 | --- | 5315 |
| DON-x20 | 0.26...10.6 | 310 | 617 | 310 | 617 | --- | --- |
| DON-x25 | 2.6...40 | 98 | 394 | 98 | 197 | --- | --- |
| DON-x30 | 4.0...66 | 51 | 208 | 51 | 102 | --- | --- |
| DON-x35 | 8.0...120 | 24.2 | 96.5 | 24.2 | 51.1 | --- | --- |
| DON-x40 | 13...150 | 18.5 | 74.2 | 18.5 | 37.1 | --- | --- |
| DON-x45 | 10...200 | 9.7 | 39.0 | 9.7 | 19.5 | --- | --- |
| DON-x50 | 13...260 | 5.7 | 22.3 | 5.7 | 11.4 | --- | --- |
| DON-x55 | 20...400 | 3.97 | 15.9 | 3.97 | 7.95 | --- | --- |
| DON-x60 | 40...660 | 2.12 | 8.71 | 2.12 | 4.35 | --- | --- |

*The output resolution values listed in the above table are only approximate values. The exact output resolution value is noted within the calibration certificate delivered with each flowmeter.

Oval Gear Flowmeter Model DON



Order Details (Example: DON-105G N1 1 L0 N 0)

| Measuring Range | Housing/Rotor Material ⁴⁾ | | | Connection | O-ring Material | Electronic/Display | Cable Entry | Option |
|--------------------------------|--|-----------------|---|---|---|--|--|---|
| | Aluminum with PPS/ PEEK ¹²⁾ Rotor | Stainless Steel | St. Steel with PPS/ PEEK ¹²⁾ Rotor | | | | | |
| 0.13...9.5 GPH | DON-104G.. | DON-204G.. | DON-804G.. | ..N1.. = 1/8" NPT ..R1.. = G 1/8 | ..1.. = FKM ..3 ¹⁴⁾ .. = FEP with EPDM/ FKM Core ..4.. = NBR ..5 ¹³⁾ .. = Fluoroprene® ..9.. = Special Materials (not for ATEX) | ..R0.. = Pulse Output Reed Switch ..RE.. = R0 + ATEX (Exd) | ..M.. = M20 ..N.. = 1/2" NPT ..S ⁷⁾ .. = M20 with Cooling Fin ..T ⁷⁾ .. = 1/2" NPT with Cooling Fin | ..0.. = Without ..N.. = Without Battery ..Y ¹⁵⁾ = Special Request (not for ATEX) |
| 0.13...9.5 GPH | DON-105G.. | DON-205G.. | DON-805G.. | ..N1.. = 1/8" NPT ..R1.. = G 1/8 | | ..H0.. = Pulse Output Hall Sensor (Push-Pull)/ Reed Switch ..HE.. = H0 + ATEX (Exd) ..HU.. = Pulse Output Hall Sensor (NPN)/ Reed Switch, Supply 5-30 V _{DC} | | |
| 0.5...27 GPH | DON-110G.. | DON-210G.. | DON-810G.. | ..N2.. = 1/4" NPT ..R2.. = G 1/4 | | ..B0 ⁹⁾ .. = Pulse Output Hall Sensor (Push-Pull) for Pulsating Flow ..BE ⁹⁾ .. = B0 + ATEX (Exd) | | |
| 4...145 GPH | DON-115G.. | DON-215G.. | DON-815G.. | ..N3.. = 3/8" NPT ..R3.. = G 3/8 | | ..T0 ⁹⁾ .. = Pulse Output Hall Sensor (Push-Pull), High-Temp 300 °F Max. | | |
| 0.26...10.6 GPM | DON-120G.. | DON-220G.. | DON-820G.. | ..N4.. = 1/2" NPT ..R4.. = G 1/2 ..P4 ⁵⁾ .. = 1/2" NPT (1450 psi) ..H4 ⁵⁾ .. = G 1/2 (1450 psi) | | ..K0 ⁹⁾ .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x2) ..KE ⁹⁾ .. = K0 + ATEX (Exd) | | |
| 2.6...40 GPM | DON-125G.. | DON-225G.. | DON-825G.. | ..N6.. = 1" NPT ..R6.. = G 1 ..A6.. = 1" 150 lb ANSI Flange ..B6.. = 1" 300 lb ANSI Flange ..F6.. = DN25 PN40 DIN Flange ..P6 ⁵⁾ .. = 1" NPT (1450 psi) ..H6 ⁵⁾ .. = G 1 (1450 psi) | | ..G0 ⁹⁾ .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x4) ..GE ⁹⁾ .. = G0 + ATEX (Exd) ..D0.. = Quad. Hall Sensor 2 Phased Outputs (Push-Pull) ..DE.. = D0 + ATEX (Exd) | | |
| 4.0...66 GPM | DON-130G.. | DON-230G.. | DON-830G.. | ..N8.. = 1 1/2" NPT ..R8.. = G 1 1/2 ..A8.. = 1 1/2" 150 lb ANSI Flange ..B8.. = 1 1/2" 300 lb ANSI Flange ..F8.. = DN40 PN40 DIN Flange | | ..L0.. = 4...20 mA Loop Powered Analog Output ..LE.. = L0 + ATEX (Exd) ..Z1.. = LCD Dual Totalizer with Battery Supply, Outputs Deactivated (ZOK-Z1) ..Z2.. = LCD Batching Unit (ZOK-Z2) ..Z3.. = LCD Totalizer, Rate, Outputs: 4-20 mA, Alarm, Pulse (ZOK-Z3) (Impulses not for Battery Supply) ..Z5.. = Z3 + 2 SPDT Relays ..Z6.. = Z1 + B0 ..Z7.. = Z3 + B0 ..Z8.. = Z1 + D0 ..Z9.. = Z3 + D0 ..ZE.. = LCD Rate/Total (ZOE with External Supply/ with Battery) ..ZB ¹¹⁾ .. = LCD Rate/Total (ZOE without External Supply/ with Battery) | | |
| 8.0...120 GPM | DON-135G.. | DON-235G.. | DON-835G.. | ..N9.. = 2" NPT ..R9.. = G 2 ..A9.. = 2" 150 lb ANSI Flange ..B9 ¹⁾ .. = 2" 300 lb ANSI Flange | | ..E1 ¹¹⁾ .. = Z1 + ATEX/IECEX (Exi) ..E2 ¹¹⁾ .. = Z2 + ATEX/IECEX (Exi) ..E3 ¹¹⁾ .. = Z3 + ATEX/IECEX (Exi) (Without Switching or Pulse Outputs) ..E5 ¹¹⁾ .. = E3 + Pulse or Switching Outputs | | |
| 13...150 GPM | DON-140G.. | DON-240G.. | DON-840G.. | ..F9.. = DN50 PN16 DIN Flange ..C9 ⁹⁾ .. = DN50 PN40 DIN Flange | | ..M4 ⁶⁾ .. = Mechanical Totalizer | | |
| 10...200 GPM | DON-145G.. | DON-245G.. | DON-845G.. | ..NB.. = 3" NPT ..RB.. = G 3 ..AB.. = 3" 150 lb ANSI Flange | | ..0.. = Without | | |
| 13...260 GPM | DON-150G.. | DON-250G.. | DON-850G.. | ..FB.. = DN80 PN16 DIN Flange | | | | |
| 20...400 GPM | DON-155G.. | DON-255G.. | DON-855G.. | ..NC.. = 4" NPT ..RC.. = G 4 ..AC.. = 4" 150 lb ANSI Flange | | | | |
| 40...660 GPM ¹⁰⁾ | DON-160G.. | DON-260G.. | DON-860G.. | ..FC.. = DN100 PN16 DIN Flange | | | | |

¹⁾ Only for DON-x35 ²⁾ Only for DON-x04, -x05 and -x10 ³⁾ Not for DON-x04, -x05 and -x10 ⁴⁾ Replace 'G' with 'H' to order LPM (LPH) ⁵⁾ With steel screws, only for DON-2.. and DON-8.. ⁶⁾ Only for DON-x20...DON-x60. Please specify flow direction when ordering (Possible flow directions: Bottom to Top, Left to Right, or Right to Left) ⁷⁾ Only for electronic options -Zx/-Ex, not for DON-1.. and DON-8.. ⁸⁾ Only for DON-2 ⁹⁾ Only for DON-x04, -x05, -x10, -x15 without reed switch ¹⁰⁾ Calibrated up to 580 GPM. Higher flow rate calibration on request ¹¹⁾ Without backlighting ¹²⁾ From DON-x20 PPS ¹³⁾ Only for DON-x04...DON-x20, this version is not calibrated with oil. Use k-factor values from the datasheet ¹⁴⁾ Only for DON-x04...DON-x40 ¹⁵⁾ Specify in writing which option(s) to add. Special cut rotors for higher viscosities: Not for DON-x04...DON-x10, Check valve: From DON-x30..., and any other non-standard request


No responsibility taken for errors; subject to change without prior notice.




Oval Gear Flowmeter Model DON

Dimensions DON-1(2/8)...


DON-x04...DON-x15

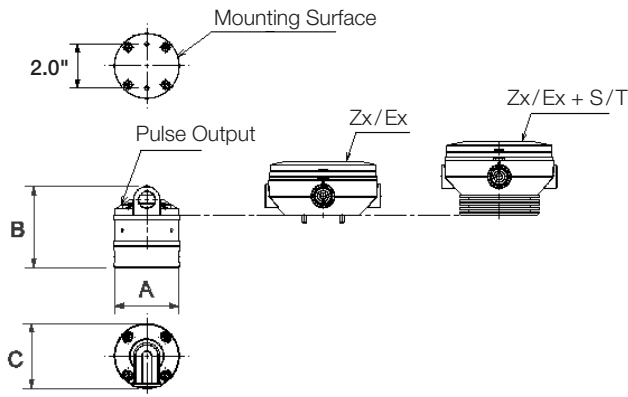


DON-x45...DON-x60

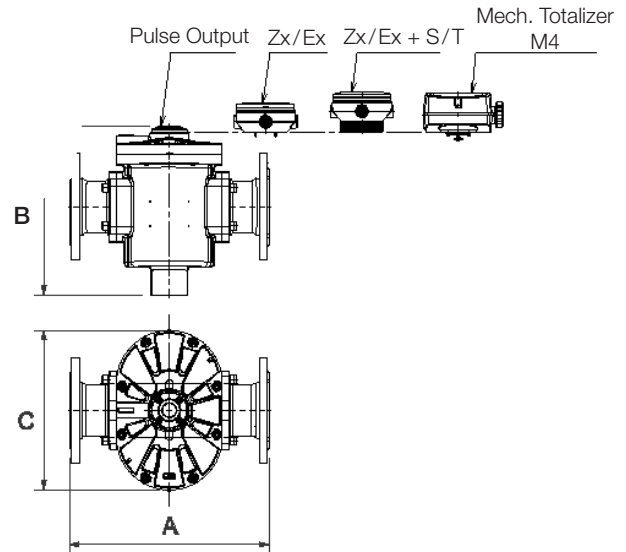

DON-x20...DON-x40

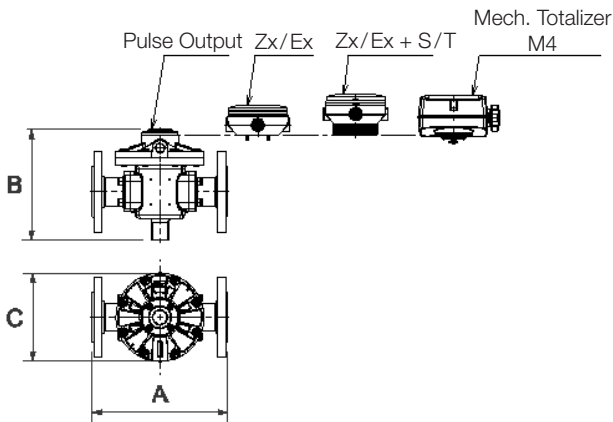

Electronic with LCD Display Zx/Ex

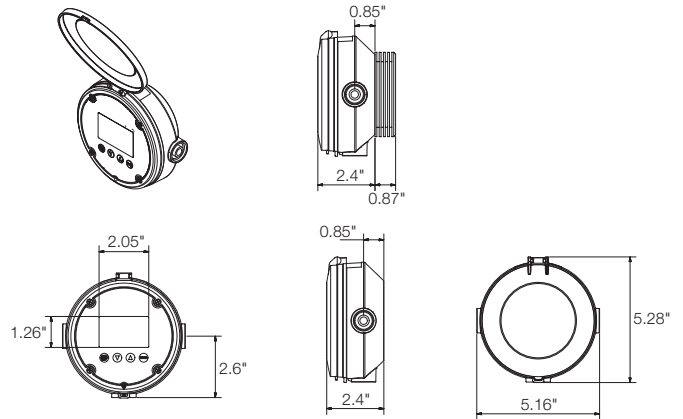

Dimensions* DON-1(2/8).... (± 0.08")

| Model | A | | B | | | C | | |
|---------|-------------------|-------------------|---------------|---------------|-------------------------|-----------------|--------|-------------------------|
| | Thread Connection | Flange Connection | Pulse Output | Zx/Ex | Mechanical Totalizer M4 | Pulse Output/Lx | Zx/Ex | Mechanical Totalizer M4 |
| DON-x04 | 2.67" | - | 3.62" | 5.16" | - | 2.83" | 5.28" | - |
| DON-x05 | 2.67" | - | 3.62" | 5.16" | - | 2.83" | 5.28" | - |
| DON-x10 | 2.67" | - | 3.62" | 5.16" | - | 2.83" | 5.28" | - |
| DON-x15 | 2.67" | - | 3.89" | 5.43" | - | 2.83" | 5.28" | - |
| DON-x20 | 4.33" | - | 4.13" (3.98") | 5.28" (5.12") | 7.17" (7.01") | 4.41" | 5.28" | 6.50" |
| DON-x25 | 6.93" | 9.33" | 5.36" | 6.50" | 7.64" | 4.72" | 5.28" | 6.69" |
| DON-x30 | 7.40" | 9.92" | 6.54" | 7.68" | 8.78" | 6.42" | 6.42" | 7.88" |
| DON-x35 | 8.34" | 10.90" | 6.77" | 7.92" | 9.61" | 7.09" | 7.09" | 7.88" |
| DON-x40 | 8.34" | 10.90" | 9.69" | 10.83" | 11.77" | 7.09" | 7.09" | 7.88" |
| DON-x45 | 10.50" | 13.90" | 9.13" | 10.28" | 11.18" | 9.37" | 9.37" | 9.41" |
| DON-x50 | 11.60" | 15.00" | 9.02" | 10.16" | 11.89" | 11.41" | 11.41" | 11.41" |
| DON-x55 | 11.60" | 15.30" | 10.80" | 11.93" | 13.66" | 11.41" | 11.41" | 11.41" |
| DON-x60 | 12.60" | 16.30" | 13.80" | 14.96" | 16.70" | 13.03" | 13.03" | 13.03" |

*Dimensions for DON-2/8... are specified in () only when they are different from DON-1...