

# Oval Gear Flowmeter for Low and High Viscosity Liquids



measuring  
•  
monitoring  
•  
analyzing

**DON**



- Measuring Range:  
0.13 ... 9.5 GPH to 40 ... 660 GPM
- Viscosity Range: up to 1000 cP (Standard)  
(Higher Viscosities with Special Cut Rotors)
- Accuracy:  $\pm 0.2\% \dots 1\%$  of Reading
- Material: Aluminum or Stainless Steel
- $p_{max}$ : 1450 PSI;  $t_{max}$ : 300 °F
- Pulse Output, LCD Display, 4...20 mA,  
Alarms, Mechanical Totalizer
- Bi-directional Measurement
- U-Pace Electronics: IO-Link and  
Temperature Measurement



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, RUSSIA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM


KOBOLD Instruments, Inc.  
1801 Parkway View Drive  
Pittsburgh, PA 15205  
Main Office:  
1.800.998.1020  
1.412.788.4890  
info@koboldusa.com  
www.koboldusa.com

**Description**

Oval gear flowmeters are categorized as positive displacement flow technology. When liquid flows through this type of positive displacement flowmeter, two oval gear rotors measure a constant volume per rotation within a precisely machined measuring chamber. With each rotation, a constant volume of liquid is measured. The rotation of the oval gears is sensed via magnets embedded within the rotors. These magnets transmit a high resolution pulse output. The output signal can be processed externally via a remote display controller or PLC or via a variety of output/display options available as accessories attached to the flowmeters.

**Operation:**

Liquid travels around the crescent shaped chambers created by the rotational movement of the rotors

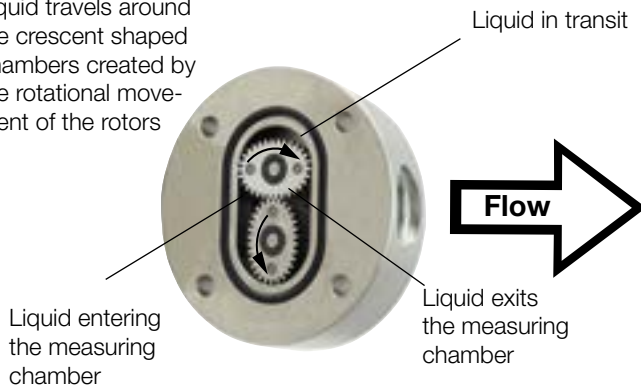

In addition, our U-PACE electronics (Universal Precision and Control Electronics, (order code C3T0) is available and features two outputs arbitrarily configurable by the customer. The compact electronics offers various diagnostic functions and the following features:

- Flow and temperature measurement
- Monitoring, batching and transmitter function
- Batch function with external control input
- Colored, multi-parameter configurable TFT-display, rotatable in 90° increments
- Bidirectional measurement
- Intuitive step menu via 4 optical touch keys
- 2 configurable outputs (pulse-/frequency-/alarm- and analog output)
- Grand and resettable totalizer
- IO link function

The positive displacement flow technology allows for precise flow measurement of most clean liquids regardless of the media's conductivity. Other liquid properties also have a minimal effect on the performance of this type of meter. Flow profile conditioning is not required, as with alternative flow technology options, making oval gear installations simple to install in tight spaces and at an economical price.

**Areas of Application**

Suitable for viscous, non abrasive, clean liquids like:

- Petroleum
- Oil
- Chemicals
- Grease
- Fuels
- Ink
- Pastes

Aluminum body meters are compatible with fuels, fuel oils, & other lubricating liquids. In addition to lubricating media, stainless steel flowmeters are suitable for most products and chemicals.

**Technical Data**

**Materials**

**DON-1/3**

- Body:** Aluminum
- Gears:** PPS GF30/PTFE, PEEK
- Axles:** 316L Stainless Steel

**DON-2/4**

- Body**
- DON-x04 ... DON-x15:** 316L Stainless Steel
- DON-x20 ... DON-x60:** 316L/301\* Stainless Steel

**Gears**

- DON-x04 ... DON-x40:** 316L Stainless Steel
- DON-x45 ... DON-x60:** 301\* Stainless Steel

**Bearing:**

Carbon Graphite

**Axles:**

316L Stainless Steel

\* Closest AISI Equivalent to 1.3955 Stainless Steel



**Materials (Continued)**

**DON-8/9**

**Body**

**DON-x04...DON-x15:** 316L Stainless Steel  
**DON-x20...DON-x60:** 316L/301\* Stainless Steel

**Gears:** PPS GF30/PTFE, PEEK

**Axles:** 316L Stainless Steel

**O-Rings (Media Temperature Limits)**

**FKM:** -4 ... 300 °F  
**NBR:** -4 ... 212 °F  
**FEP with EPDM/FKM core:** 5...248 °F  
 (only for DON-x04...DON-x40)  
**Fluoroprene®:** -4 ... 300 °F Acc. to Regulation (EC) No.  
 1935/2004

**Electrical Cover (for Cable Connection)**

**Standard:** Polyamide PA6 GF35 UL94 HB/VO  
**Optional:** 316L Stainless Steel

**Cable Entry:** M20 x 1.5 or 1/2" NPT Adapter

**Magnet Encapsulation**

**DON-x04... DON-x10:** PEEK  
**DON-x15... DON-x60:** 316L Stainless Steel

**Screw Material**

**for Aluminum Housing:** Stainless Steel (Standard)  
 Steel Coated with GEOMET® 321  
 (for DON-225 and DON-825)  
**for Stainless Steel Housing:** Stainless Steel (Standard)  
 Steel Coated with GEOMET®321  
 (optional) for Higher Pressure Rating  
 (See Order Details)

**Accuracy\*\***

**DON-x04:** ± 3% of Reading (0.13...0.95 GPH),  
 ± 1% of Reading (0.95...9.5 GPH)

**DON-x05...DON-x15:** ± 1% of Reading

**DON-x20...DON-x60**

**SS Rotors:** ± 0.5% of Reading;  
 ± 0.2% of Reading w/ Optional  
 Z3/3A Electronics w/ Linearization  
 Function

**PPS Rotors:** ± 1% of Reading;  
 ± 0.5% of Reading w/ Optional  
 Z3/3A Electronics w/ Linearization  
 Function

**Option M4:** ± 1% of Reading (Better Accuracy  
 for higher viscosities on request)

**Additional Max. Inaccuracy**

**for Elec. Signal Outputs:** analog output 4-20mA for -Lx and  
 -Zx electronics: ±0.15% full scale  
 Temperature error referenced to  
 room temperature:  
 analog output -CT: < 200ppm/K  
 frequency output -CT: <100ppm/K  
 ± 0.03 % Typical

**Repeatability:**

**Protection Class:** IP 66/67 (IP65 for M4)

**Media Temperature**

**Options ..Lx, ..Zx, ..M4:** -4...176 °F  
**DON-1/3/8/9:** -4...176 °F  
**DON-2/4 w/ Pulse Out and**  
**Option ..Zx w/ Cooling Fins:** -4...248 °F  
**Option ..T0:** -4...302 °F

**Models with**

**PPS/PEEK Rotors:** Max. 176 °F

**Ambient Temperature:** -4... 176 °F

**Option M4:** 32...140 °F

**Options 1A to 5A:** -4...140 °F

**Option CT:** -4...140 °F (at Tmedia ≤ 158°F)

-4...110 °F (at Tmedia ≤ 176°F)

\*\* Reference Conditions: DON-x10...x60 (Calibration Oil, 4.6 cSt, 77 °F, 14 PSIG)  
 DON-x04, DON-x05 and DON-x15 for higher viscosities  
 (Calibration Oil, 10 cSt, 68 °F, 14 PSIG)  
 Accuracy data is valid for given viscosities and higher



**ATEX - Approval**

**Mechanical Explosion Protection:** Ex II 2G Ex h IIC T4/T3 Gb

**Options 1A/2A/3A/5A:**

**Intrinsically Safe:** Ex II 2G Ex ia IIC T4 Gb (-20°C ≤ Ta ≤ +60°C)

**Options HE, DE, BE, KE, GE, LE:**

**Flameproof Enclosure:** Ex II 2G Ex db IIC T4/T6 Gb

Ex I M2 Ex db I Mb

**Options HA, DA, BA, KA, GA:**

**Intrinsically Safe:** Ex II 3G Ex ic IIC T4/T3 Gc

**IECEx - Approval**

**Options HE, DE, BE, KE, GE, LE:**

**Flameproof Enclosure:** Ex db IIC T4 Gb

Ex db I Mb

**Maximum Pressure (Threaded Models)**

Model	Maximum Pressure (PSI)			
	DON-1/3	DON-2/4/8/9	DON-1 (Option-M4)	DON-2/8 (Option-M4)
DON-x04	925	1450	-	-
DON-x05			-	-
DON-x10			-	-
DON-x15			-	-
DON-x20			1000*	580
DON-x25	870*			
DON-x30	580	725	435	435
DON-x35				
DON-x40	230	230	230	230
DON-x45				
DON-x50				
DON-x55				
DON-x60				

With flanges: Maximum pressure rating as above or as per flange rating, whichever is lower.  
 \* Max pressure of 1450 psi possible with steel screws (see order details)

**Pulse Output (..H0/HE/HA)**

Options H0/HE/HA are equipped with a Reed switch pulse output and a Hall sensor pulse output:

**Reed Switch Pulse Output**

The reed switch output is a two wire, normally open, SPST, voltage free contact ideal for installations without power or for use in hazardous area locations where Intrinsically Safe (I.S.) is required. Note: when using the reed switch output, the liquid temperature must not change at a rate greater than 18°F per minute.

Average switching life of reed contact (MTTF):

Max. Load (30 V/10 mA) 5 x 10<sup>5</sup> switching cycles

Min. Load (<5 V/10 mA) 5 x 10<sup>8</sup> switching cycles

Switching Capacity: Max. 30 V<sub>DC</sub>, Max. 20 mA

**Hall Sensor Pulse Output**

With this signal output, a Hall Effect sensor is combined with an active push-pull output. The signal output is actively switched either to +Vs or to ground. No additional external circuit is required (e.g. pull-up resistor). The "high" signal is approximately equal to the supply voltage +Vs and the "low" signal is approximately 0 V. The electronic utilizes a 3-wire connection with an external supply voltage of 8...30 V<sub>DC</sub>. The electrical load may be optionally connected to the supply voltage or to GND. Maximum output current (current source or sink): 100 mA (short circuit protected).

**Hall Sensor Pulse Output (..HU)**

Like option H0, except an NPN output in place of the push-pull output and a supply voltage of 5-30 V<sub>DC</sub>.

**Hall Sensor Pulse Output, (..B0/BE/BA)**

Like options H0/HE/HA; however with bipolar sensors and alternating polarized magnets. This option is used for pulsating flow, but is not equipped with a Reed switch and has half the k-factor value as compared to H0/HE/HA.

**High-Resolution Hall Sensor Pulse Output, (..G0/GE/GA, ..K0/KE/KA)**

Like options H0/HE/HA; the models DON-x05 and DON-x10 can be supplied with four times the pulse count per volume unit (..G0/GE/GA) and models DON-x05, DON-x10 and DON-x15 with double the amount of pulses (..K0/KE/KA) (See table «Output Pulse Resolution» on the following pages).

**Quadrature Hall Effect Pulse Output (..D0/DE/DA)**

The DON with option D0/DE/DA provides two independent Hall sensors. They are arranged to give separate outputs out of phase with one another.

The QUAD output is mostly suitable for detecting bidirectional flows (detection of flow direction) or where a redundant signal is desirable. Maximum output current per channel (current source or sink): 100 mA (short circuit protected).

**Analog Output (..L0/LE)**

The options L0 and LE (Exd) are available with a loop-powered 4-20 mA output. The loop must be powered with an external, 16...32 V<sub>DC</sub> power supply. The maximum resistance of the series loads (PLC analog input/display electronics) depends on the magnitude of the supply voltage and can be calculated as follows:

$$\text{Max. load [Ohm]} = (+Vs - 9 V_{DC}) / 0.02 \text{ A } [\Omega]$$

$$\text{Example: } +Vs = 32 V_{DC} = > \text{max. load} = 1150 \Omega$$

$$+Vs = 16 V_{DC} => \text{max. load} = 350 \Omega$$

The load can be inserted at any point in the current loop, observing correct polarity.

**Mechanical Totalizer (..M4)**

The DON-x20.. through DON-x60.. are available with a 4-digit resettable totalizer and indication of accumulated total value. The motion of the rotors is transmitted to the mechanical register totalizer via an interfacing reduction gear train and dynamic seal assembly. Option M4 is available in liters and gallons for DON-x20.. through DON-x40.., and in 10 liters and 10 gallons for DON-x45.. through DON-x60..

Body Material: Enameled Die-cast Aluminum, Powder-coated

Protection: IP 65

Ambient Temp: 32...140 °F

Media Temp: -4...176 °F

**Recommended Filter (for example model MFR-DO..):**

DON-x04...DON-x15 < 75 μm (200 mesh)

DON-x20...DON-x35 < 150 μm (100 mesh)

DON-x40...DON-x60 < 350 μm (45 mesh)



**Electronic with LCD Display**

Model	..Z1	..Z2	..Z3	Z5	..ZE	..ZB	..1A	..2A	..3A	..5A
Function	Dual Totalizer	Batching Unit	Rate/Totalizer				Dual Totalizer	Batching Unit	Rate/Totalizer	Rate/Totalizer
<b>Power Supply</b>										
External	5 - 28 V <sub>DC</sub>	12 - 28 V <sub>DC</sub>	5 - 28 V <sub>DC</sub>		9 - 28 V <sub>DC</sub>	-	U <sub>i</sub> = 28 V I <sub>i</sub> = 100 mA P <sub>i</sub> = 0.7 W			
Battery-Operation (Outputs Inactive) <sup>2)</sup>	yes	no	yes	no	yes	yes	yes	no	yes	no
Battery Included in Shipment <sup>3)</sup>	yes	-	yes	-	yes	yes	yes	-	yes	-
<b>LCD Display</b>										
Selectable Units	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Decimal Point	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Accumulative Total	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Resettable Total	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Linearization	yes	no	yes	yes	yes	yes	yes	no	yes	yes
Rate Display	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Backlighting	yes	yes	yes	yes	yes	no	no	no	no	no
<b>Input</b>										
Sensors	Hall Sensor / Reed Switch									
<b>Outputs</b>										
4-20 mA	no	no	yes	yes	no	no	no	no	yes	yes
Flow Rate Alarm Min./Max.	no	no	NPN/PNP/ Push-Pull	NPN/PNP/ Push-Pull	no	no	no	no	no	with Solid State Relay Board
Batch End & Control	no	yes	no	no	no	no	no	yes	no	no
Pulse Output	no	no	Push-Pull	Push-Pull	Push-Pull	no	no	no	no	with Solid State Relay Board
2 x SPDT Relays <sup>1)</sup>	no	yes	no	yes	no	no	no	with Solid State Relay Board	no	
<b>Installation</b>										
IP 65	yes	yes	yes	yes	IP 66/67	IP 66/67	yes	yes	yes	yes
Cable Entries	M20x1.5 or ½" NPT									
Media Temperature Range (Cooling Fin Option: Max. 250 °F)	-4...176 °F									
Ambient Temperature Range	-4...176 °F					32...140 °F				
Housing Material	PA6 GF35 UL94 HB/VO/PC UL94 V-2									
ATEX Approval	no					yes				

<sup>1)</sup> Replaces solid state outputs, for details see ZOK Datasheet

<sup>2)</sup> Battery operation only applicable with the reed switch sensor option of electronics options H0/HE/HA

<sup>3)</sup> Options Z5, Z6, Z7, Z8, and Z9 are shipped without batteries

**U-PACE electronics (...CT)**

The universal U-PACE electronics (Universal Precision and Control Electronics, order code C3T0) features two outputs arbitrarily configurable by the customer. In addition, the U-PACE electronics offers various diagnostic functions and the following features:

- Flow and temperature measurement
- Monitoring, batching and transmitter function
- Batch function with external control input
- Colored, multi-parameter configurable TFT-display, rotatable in 90° steps
- Bidirectional measurement
- Intuitive setup menu via 4 optical touch keys
- 2 configurable outputs (pulse-/frequency-/alarm- and analog output)
- Grand and resettable totalizer
- IO link function

**Materials**

**Housing:** aluminum for DON-1 and DON-3  
316L SS for DON-2,4,8,9

**Display:** PC

**Housing Screw Cap:** PA6

**Electrical Details U-PACE**

**Supply voltage:** 19-30 V<sub>DC</sub>, internal power consumption max. 200mA

**Display:** TFT display, 128 x 128 pixels, 1.4" display orientation in 90° steps adjustable

**Display repetition rate:** 0.5... 10s, adjustable

**Pulse output:** Push-Pull, freely scalable, configurable for partial and accumulated totalizer

**Frequency output:** Push-Pull, freely scalable, 2kHz @ overflow  
f<sub>min</sub> @ FS = 50 HZ  
f<sub>max</sub> @ FS = 1000 HZ

**Alarm output:** NPN, PNP, Push-Pull configurable max. 30 V<sub>DC</sub>  
max. 200mA short-circuit proof

**Analog output:** active, 3 wire, 0(4)-20 mA, max. load 500 or 0(2)-10 V<sub>DC</sub>, (R<sub>i</sub> = 500Ω)  
factory calibrated with R<sub>L</sub> = 1M)

**Control input:** active signal U<sub>high</sub> max. 30 V<sub>DC</sub>  
0 < Low < 10 V<sub>DC</sub>  
15 V<sub>DC</sub> < High < V<sub>s</sub>

**Batching function:** Batching output OUT2: Push-Pull, High active  
Control input OUT 1: START/STOP 0.5 s < t<sub>high</sub> < 4 s  
RESET t<sub>high</sub> < 5 s

**Response time electrical outputs:** Size X05 to X20 and X45 to X60: < 1.5 s  
Size Z25 to X40: < 0.5 s

**Temperature measurement**


**Meas. range:** -4...176°  
**Accuracy:** ± 1.8° F  
**Response time t<sub>90</sub> (Sensor)** < 30 sec

**Configuration of outputs**

Output 1 (OUT1, PIN4)	Output 2 (OUT2, PIN2)
Analog output 4-20 mA	Analog output 4-20 mA
Analog output 0-20 mA	Analog output 0-20 mA
Analog output 2-10 V	Analog output 2-10 V
Analog output 0-10 V	Analog output 0-10 V
Switching output NPN/PNP/PP	Switching output NPN/PNP/PP
Pulse output PP	Pulse output PP
Frequency output PP	Frequency output PP
Communication mode KofiCom	
Communication mode IO-Link	
Control Input	
Control input batching function	Batching output


**IO-Link specification**

Manufacturer ID: 1105 (decimal), 0 x 0451 (hex)  
Manufacturer name: Kobold Messring GmbH  
IO-Link specification: V1.1  
Bitrate: COM3  
Minimal cycle time: 1.1 ms  
SIO-Mode: yes (OUT1 in configuration IO-Link)  
Block parameterization: yes  
Operational readiness: 10 s  
Max. cable length: 20 m

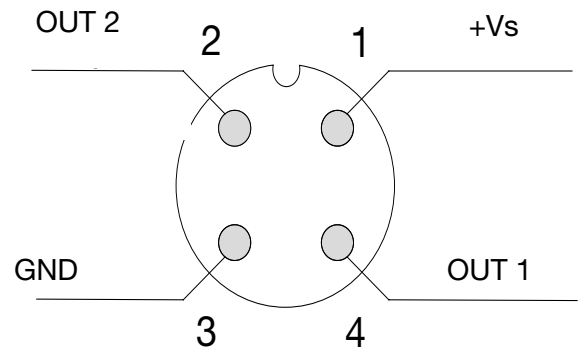




**DON Pressure Drop Versus Viscosity Curves**

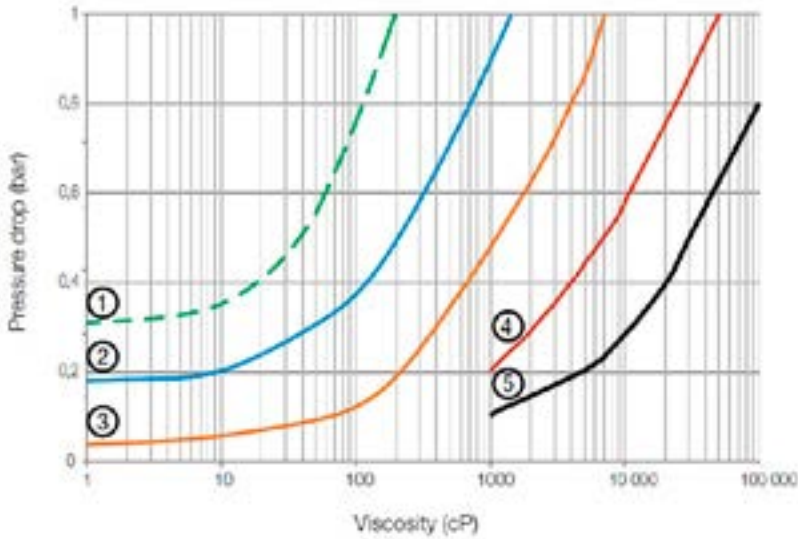

- ① Standard Rotors 100% of Full Scale
- ② Standard Rotors 50% of Full Scale  
Special Cut Rotors 100% of Full Scale
- ③ Standard Rotors 25% of Full Scale  
Special Cut Rotors 50% of Full Scale
- ④ Special Rotors 25% of Full Scale
- ⑤ Special Rotors 10% of Full Scale

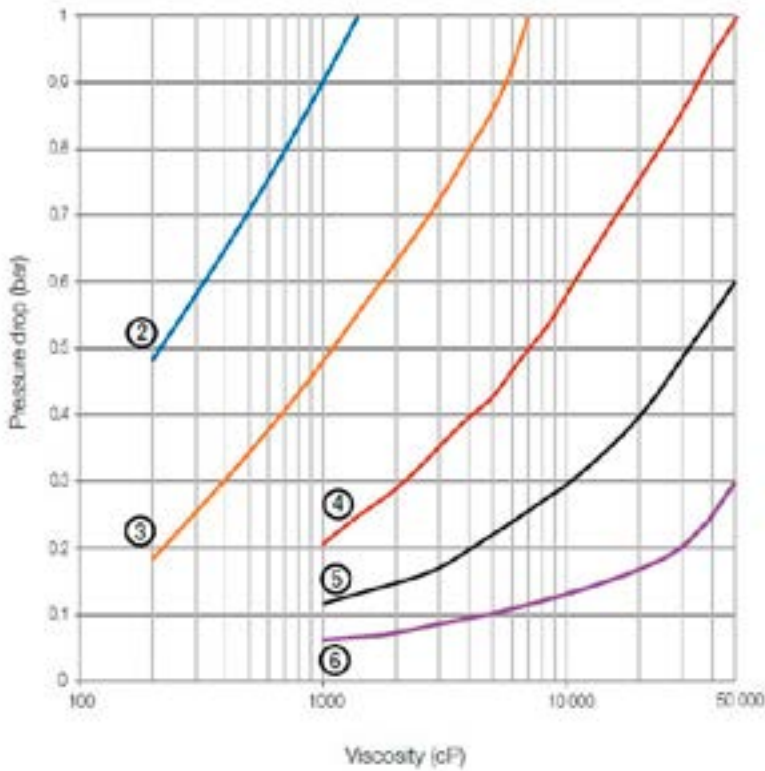

- ② Standard Rotors 50% of Full Scale  
Special Cut Rotors 100% of Full Scale
- ③ Standard Rotors 25% of Full Scale  
Special Cut Rotors 50% of Full Scale
- ④ Special Cut Rotors 25% of Full Scale
- ⑤ Special Cut Rotors 10% of Full Scale
- ⑥ Special Cut Rotors 5% of Full Scale

**Pressure Drop Limit Versus Flowrate**

The curves above represent the pressure drop for standard cut oval rotors. Special cut rotors of DON-3/4/9 have alternate tooth relief which effectively reduces the pressure drop by 50%. When sizing a meter, be sure your selection falls below the 1 bar (14.5 PSI) maximum allowable pressure drop line on the graph.



**Maximum Flowrate Multiplier (for Higher Viscosities)**

Viscosity (cPs)	Standard Rotor	Special Cut Rotor
≤ 1,000	1	1
≤ 2,000	0.5	1
≤ 4,000	0.42	0.84
≤ 6,000	0.33	0.66
≤ 8,000	0.25	0.5
≤ 30,000	0.15	0.3
≤ 60,000	0.12	0.25
≤ 150,000	0.1	0.2
≤ 250,000	0.05	0.1
≤ 1,000,000	0.025	0.05

**Noise Level (in dB) at Full Scale**

Size	PPS Gears	SS Gears
x25	83	91
x30	84	93.1
x35	83.5	95
x40	85.4	96
x45	87.5	98
x50	86.1	99.4
x55	86.1	98.1
x60	85	99

**Special Cut Rotors for Higher Viscosities**

For viscosities > 1000 cP, special cut rotors of DON/3/4/9 are normally required to keep the maximum pressure drop from exceeding acceptable levels. This option applies to DON-x15 and larger sizes. For higher viscosities, the flowmeter max. flowrate is derated according to the table above. At viscosities < 1000 cP these special rotors are less accurate  
Example:

DON-x25G measuring viscous oil at 8000 cP:  
max. flow of 40 GPM x 0.5 = 20.0 GPM new max. flow rate.

**Information Required for Order:**

To ensure proper operation, this product requires a completed application guide form to be submitted with any order. Please refer to the 'documentation' tab on the bottom of the product page for this product on our website in order to obtain the correct form. You can also contact your KOBOLD representative for this form.

**Nominal Output Pulse Resolution\***

Model	Flow Range (GPM)	Pulse per Gallon					
		Reed Switch Hx	Hall Sensor Hx	Hall Sensor Bx	Quadrature-Hall Sensor Dx	Hall Sensor, High-Resolution Gx	Hall Sensor, High-Resolution Kx
DON-x04	0.13...9.5 GPH	10107	10107	---	10093	42851	20214
DON-x05	0.13...9.5 GPH	10107	10107	---	10093	42851	20214
DON-x10	0.5...27 GPH	4020	4020	---	4020	16080	8040
DON-x15	4...145 GPH	1329	2657	1329	2657	---	5315
DON-x20	0.26...10.6	310	617	310	617	---	---
DON-x25	2.6...40	98	394	98	197	---	---
DON-x30	4.0...66	51	208	51	102	---	---
DON-x35	8.0...120	24.2	96.5	24.2	51.1	---	---
DON-x40	13...150	18.5	74.2	18.5	37.1	---	---
DON-x45	10...200	9.7	39.0	9.7	19.5	---	---
DON-x50	13...260	5.7	22.3	5.7	11.4	---	---
DON-x55	20...400	3.97	15.9	3.97	7.95	---	---
DON-x60	40...660	2.12	8.71	2.12	4.35	---	---

\*The output resolution values listed in the above table are only approximate values. The exact output resolution value is noted within the calibration certificate delivered with each flowmeter.



Oval Gear Flowmeter Model DON



Order Details (Example: DON-105G N1 1 L0 N 0)

Measuring Range	Housing/Rotor Material <sup>4)</sup>			Connection	O-ring Material	Electronic/Display	Cable Entry	Option
	Aluminum with PPS/PEEK <sup>12)</sup> Rotor	Stainless Steel	St. Steel with PPS/PEEK <sup>12)</sup> Rotor					
0.13...9.5 GPH	DON-104G..	DON-204G..	DON-804G..	..N1.. = 1/8" NPT ..R1.. = G 1/8	..1.. = FKM  ..3 <sup>14)</sup> .. = FEP with EPDM/FKM Core  ..4.. = NBR  ..5 <sup>13)</sup> .. = Fluoroprene <sup>®</sup>  ..9.. = Special Materials (not for ATEX)	..H0.. = Pulse Output Hall Sensor (Push-Pull)/ Reed Switch ..HU <sup>14)</sup> .. = Pulse Output Hall Sensor (NPN)/Reed Switch, Supply 5-30 V <sub>DC</sub> ..B0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull) for Pulsating Flow ..T0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High-Temp 300 °F Max. ..K0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x2) ..G0 <sup>2)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x4) ..D0.. = Quad. Hall Sensor 2 Phased Outputs (Push-Pull) ..L0.. = 4...20 mA Loop Powered, Analog Output ..Z1.. = LCD Dual Totalizer with Battery Supply, Outputs Deactivated (ZOK-Z1) ..Z2.. = LCD Batching Unit (ZOK-Z2) ..Z3.. = LCD Totalizer, Rate, Outputs: 4-20 mA, Alarm, Pulse (ZOK-Z3) (Impulses not for Battery Supply) ..Z5.. = Z3 + 2 SPDT Relays ..Z6.. = Z1 + B0 ..Z7.. = Z3 + B0 ..Z8.. = Z1 + D0 ..Z9.. = Z3 + D0 ..ZE.. = LCD Rate/Total (ZOE with External Supply/with Battery) ..ZB <sup>11)</sup> .. = LCD Rate/Total (ZOE without External Supply/ with Battery)	..M.. = M20  ..N.. = 1/2" NPT  ..S <sup>7)</sup> .. = M20 with Cooling Fin  ..T <sup>7)</sup> .. = 1/2" NPT with Cooling Fin	..0 = Without  ..N = Without Battery  ..Y = Special Request, not for ATEX. (Specify in clear text, e.g. check valve)
0.13...9.5 GPH	DON-105G..	DON-205G..	DON-805G..	..N1.. = 1/8" NPT ..R1.. = G 1/8				
0.5...27 GPH	DON-110G..	DON-210G..	DON-810G..	..N2.. = 1/4" NPT ..R2.. = G 1/4				
4...145 GPH	DON-115G..	DON-215G..	DON-815G..	..N3.. = 3/8" NPT ..R3.. = G 3/8				
0.26...10.6 GPM	DON-120G..	DON-220G..	DON-820G..	..N4.. = 1/2" NPT ..R4.. = G 1/2 ..P4 <sup>9)</sup> .. = 1/2" NPT (1450 psi) ..H4 <sup>9)</sup> .. = G 1/2 (1450 psi)				
2.6...40 GPM	DON-125G..	DON-225G..	DON-825G..	..N6.. = 1" NPT ..R6.. = G 1 ..A6.. = 1" 150 lb ANSI Flange ..B6.. = 1" 300 lb ANSI Flange ..F6.. = DN25 PN40 DIN Flange ..P6 <sup>9)</sup> .. = 1" NPT (1450 psi) ..H6 <sup>9)</sup> .. = G 1 (1450 psi)				
4.0...66 GPM	DON-130G..	DON-230G..	DON-830G..	..N8.. = 1 1/2" NPT ..R8.. = G 1 1/2 ..A8.. = 1 1/2" 150 lb ANSI Flange ..B8.. = 1 1/2" 300 lb ANSI Flange ..F8.. = DN40 PN40 DIN Flange				
8.0...120 GPM	DON-135G..	DON-235G..	DON-835G..	..N9.. = 2" NPT ..R9.. = G 2 ..A9.. = 2" 150 lb ANSI Flange ..B9 <sup>1)</sup> .. = 2" 300 lb ANSI Flange ..F9.. = DN50 PN16 DIN Flange ..C9 <sup>9)</sup> .. = DN50 PN40 DIN Flange				
13...150 GPM	DON-140G..	DON-240G..	DON-840G..	..N9.. = 2" NPT ..R9.. = G 2 ..A9.. = 2" 150 lb ANSI Flange ..B9 <sup>1)</sup> .. = 2" 300 lb ANSI Flange ..F9.. = DN50 PN16 DIN Flange ..C9 <sup>9)</sup> .. = DN50 PN40 DIN Flange				
10...200 GPM	DON-145G..	DON-245G..	DON-845G..	..NB.. = 3" NPT ..RB.. = G 3 ..AB.. = 3" 150 lb ANSI Flange				
13...260 GPM	DON-150G..	DON-250G..	DON-850G..	..FB.. = DN80 PN16 DIN Flange				
20...400 GPM	DON-155G..	DON-255G..	DON-855G..	..NC.. = 4" NPT ..RC.. = G 4 ..AC.. = 4" 150 lb ANSI Flange				
40...660 GPM <sup>10)</sup>	DON-160G..	DON-260G..	DON-860G..	..FC.. = DN100 PN16 DIN Flange				

<sup>1)</sup> Only for DON-x35 <sup>2)</sup> Only for DON-x04, -x05 and -x10 <sup>3)</sup> Not for DON-x04, -x05 and -x10 <sup>4)</sup> Replace 'G' with 'H' to order LPM (LPH) <sup>5)</sup> With steel screws, only for DON-2.. and DON-8.. <sup>6)</sup> Only for DON-x20...DON-x60. Please specify flow direction when ordering (Possible flow directions: Bottom to Top, Left to Right, or Right to Left) <sup>7)</sup> Not for electronic options 1A to 5A, not for DON-1.. and DON-8.. <sup>8)</sup> Only for DON-2 <sup>9)</sup> Only for DON-x04, -x05, -x10, -x15 without reed switch <sup>10)</sup> Calibrated up to 580 GPM. Higher flow rate calibration on request <sup>11)</sup> Without backlighting <sup>12)</sup> From DON-x20 PPS <sup>13)</sup> Only for DON-x04...DON-x20, this version is not calibrated (no calibration certificate). Use K-factor values from the datasheet <sup>14)</sup> Only for DON-x04...DON-x40 <sup>15)</sup> /min-package (nameplate (l/min or ml/min, °C, bar)), calibrated range and temperature °C, GPM-package (nameplate (GPM or GPH, °F, PSI)), calibrated range and temperature °F)

No responsibility taken for errors;  
subject to change without prior notice.



## Oval Gear Flowmeter Model DON


**Order Details** (Example: DON-105G N1 1 L0 N 0)

Measuring Range <sup>15)</sup>	Housing/Rotor Material <sup>4)</sup>			Connection	O-ring Material	Electronic/Display	Cable Entry	Option
	Aluminum with PPS/PEEK <sup>12)</sup> Rotor for High Viscosities	Stainless Steel for High Viscosities	St. Steel with PPS/PEEK <sup>12)</sup> Rotor for High Viscosities					
0.13...9.5 GPH	-	-	-	..N1.. = 1/8"NPT ..R1.. = G 1/8		..H0.. = Pulse Output Hall Sensor (Push-Pull)/Reed Switch ..HU <sup>14)</sup> .. = Pulse Output Hall Sensor (NPN)/Reed Switch, Supply 5-30 V <sub>DC</sub>		
0.13...9.5 GPH	-	-	-	..N1.. = 1/8"NPT ..R1.. = G 1/8		..B0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull) for Pulsating Flow ..T0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High-Temp 300 °F Max.		
0.5...27 GPH	-	-	-	..N2.. = 1/4"NPT ..R2.. = G 1/4		..K0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x2) ..G0 <sup>9)</sup> .. = Pulse Output Hall Sensor (Push-Pull), High Resolution (x4)		
4...145 GPH	DON-315G..	DON-415G..	DON-915G..	..N3.. = 3/8"NPT ..R3.. = G 3/8		..D0.. = Quad. Hall Sensor 2 Phased Outputs (Push-Pull) ..L0.. = 4...20 mA Loop Powered Analog Output		
0.26...10.6 GPM	DON-320G..	DON-420G..	DON-920G..	..N4.. = 1/2"NPT ..P4 <sup>9)</sup> .. = 1/2"NPT (1450 psi) ..H4 <sup>9)</sup> .. = G 1/2 (1450 psi)		..Z1.. = LCD Dual Totalizer with Battery Supply, Outputs Deactivated (ZOK-Z1) ..Z2.. = LCD Batching Unit (ZOK-Z2) ..Z3.. = LCD Totalizer, Rate, Outputs: 4-20 mA, Alarm, Pulse (ZOK-Z3) (Impulses not for Battery Supply)	..M.. = M20	..0 = Without
2.6...40 GPM	DON-325G..	DON-425G..	DON-925G..	..N6.. = 1"NPT ..R6.. = G 1 ..A6.. = 1" 150 lb ANSI Flange ..B6.. = 1" 300 lb ANSI Flange ..F6.. = DN25 PN40 DIN Flange ..P6 <sup>9)</sup> .. = 1"NPT (1450 psi) ..H6 <sup>9)</sup> .. = G 1 (1450 psi)	..1.. = FKM	..Z5.. = Z3 + 2 SPDT Relays ..Z6.. = Z1 + B0 ..Z7.. = Z3 + B0 ..Z8.. = Z1 + D0 ..Z9.. = Z3 + D0	..N.. = 1/2" NPT	..N = Without Battery
4.0...66 GPM	DON-330G..	DON-430G..	DON-930G..	..N8.. = 1 1/2"NPT ..R8.. = G 1 1/2 ..A8.. = 1 1/2" 150 lb ANSI Flange ..B8.. = 1 1/2" 300 lb ANSI Flange ..F8.. = DN40 PN40 DIN Flange	..3 <sup>14)</sup> .. = FEP with EPDM/FKM Core ..4.. = NBR	..ZE.. = LCD Rate/Total (ZOE with External Supply/with Battery) ..ZB <sup>11)</sup> .. = LCD Rate/Total (ZOE without External Supply/with Battery)	..S <sup>7)</sup> .. = M20 with Cooling Fin	..Y = Special Request, not for ATEX. (Specify in clear text, e.g. check valve)
8.0...120 GPM	DON-335G..	DON-435G..	DON-935G..	..N9.. = 2"NPT ..R9.. = G 2 ..A9.. = 2" 150 lb ANSI Flange ..B9 <sup>1)</sup> .. = 2" 300 lb ANSI Flange	..5 <sup>13)</sup> .. = Fluoroprene <sup>®</sup>		..T <sup>7)</sup> .. = 1/2" NPT with Cooling Fin	
13...150 GPM	DON-340G..	DON-440G..	DON-940G..	..F9.. = DN50 PN16 DIN Flange ..C9 <sup>9)</sup> .. = DN50 PN40 DIN Flange		..HE.. = H0 + ATEX (Exd) ..BE <sup>9)</sup> .. = B0 + ATEX (Exd) ..KE <sup>9)</sup> .. = K0 + ATEX (Exd) ..GE <sup>2)</sup> .. = G0 + ATEX (Exd) ..DE.. = D0 + ATEX (Exd) ..LE.. = L0 + ATEX (Exd)		
10...200 GPM	DON-345G..	DON-445G..	DON-945G..	..NB.. = 3"NPT ..RB.. = G 3 ..AB.. = 3" 150 lb ANSI Flange	..9.. = Special Materials (not for ATEX)	..HA.. = H0 + ATEX (Exi) ..BA <sup>9)</sup> .. = B0 + ATEX (Exi) ..KA <sup>9)</sup> .. = K0 + ATEX (Exi) ..GA <sup>2)</sup> .. = G0 + ATEX (Exi) ..DA.. = D0 + ATEX (Exi)		
13...260 GPM	DON-350G..	DON-450G..	DON-950G..	..FB.. = DN80 PN16 DIN Flange		..1A.. = ZOK-E1 + HA ATEX (Exi) ..2A.. = ZOK-E2 + HA ATEX (Exi) ..3A.. = ZOK-E3 + HA ATEX (Exi) ..5A.. = ZOK-E5 + HA ATEX (Exi) ..CT <sup>16)</sup> .. = Compact display, 2 outputs (current/voltage/pulse/frequency/alarm output/10-link configurable) M12 x1 plug		
20...400 GPM	DON-355G..	DON-455G..	DON-955G..	..NC.. = 4"NPT ..RC.. = G 4 ..AC.. = 4" 150 lb ANSI Flange ..FC.. = DN100 PN16 DIN Flange		..M4 <sup>9)</sup> .. = Mechanical Totalizer	..0.. = Without	


<sup>1)</sup> Only for DON-x35 <sup>2)</sup> Only for DON-x04, -x05 and -x10 <sup>3)</sup> Not for DON-x04, -x05 and -x10 <sup>4)</sup> Replace 'G' with 'H' to order LPM (LPH) <sup>5)</sup> With steel screws, only for DON-3.. and DON-9.. <sup>6)</sup> Only for DON-x20...DON-x60. Please specify flow direction when ordering (Possible flow directions: Bottom to Top, Left to Right, or Right to Left) <sup>7)</sup> Not for electronic options 1A to 5A, not for DON-3.. and DON-9.. <sup>8)</sup> Only for DON-4 <sup>9)</sup> Only for DON-x04, -x05, -x10, -x15 without reed switch <sup>10)</sup> Calibrated up to 580 GPM. Higher flow rate calibration on request <sup>11)</sup> Without backlighting <sup>12)</sup> From DON-x20 PPS <sup>13)</sup> Only for DON-x04...DON-x20, this version is not calibrated (no calibration certificate). Use k-factor values from the datasheet <sup>14)</sup> Only for DON-x04...DON-x40 <sup>15)</sup> Refer to the "Maximum Flowrate Multiplier (for Higher Viscosities)" table for the actual max. flow rate <sup>16)</sup> l/min-package (nameplate (l/min or ml/min, °C, bar)), calibrated range and temperature °C, GPM-package (nameplate (GPM or GPH, °F, PSI)), calibrated range and temperature °F)

**Dimensions DON-1/2/3/4/8/9)...**


**DON-x04...DON-x15**

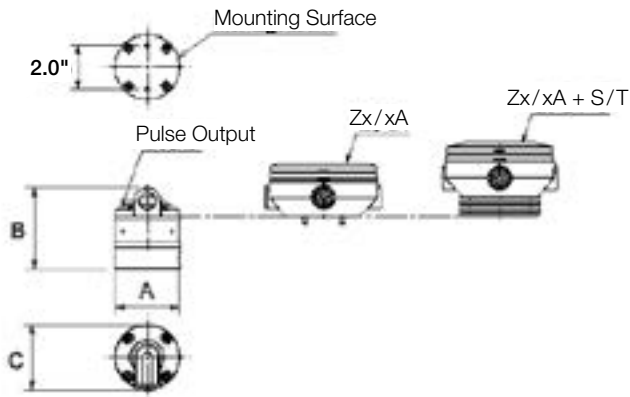


**DON-x45...DON-x60**

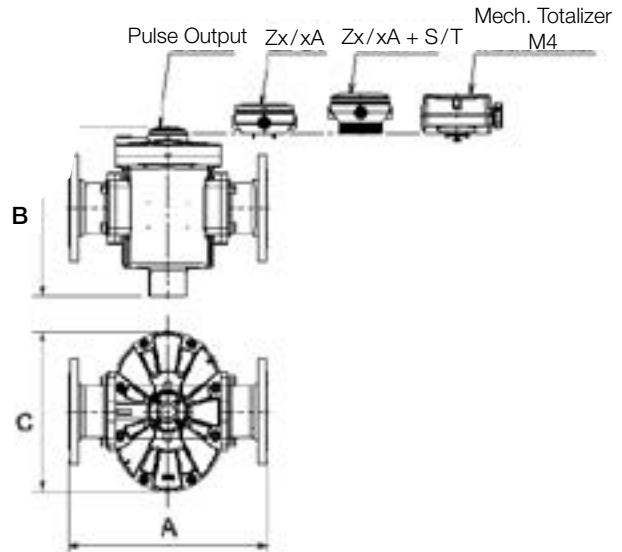

**DON-x20...DON-x40**

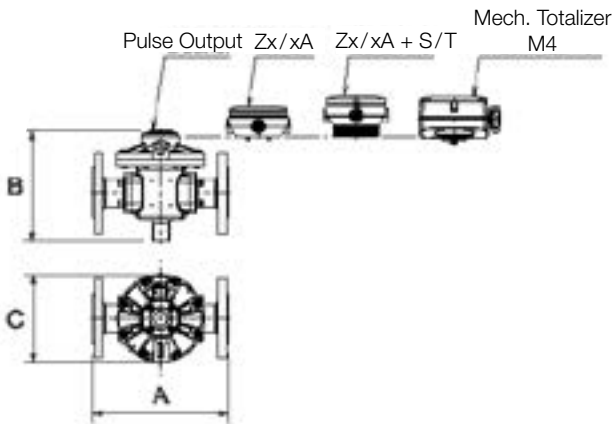

**Electronic with LCD Display Zx/xA**

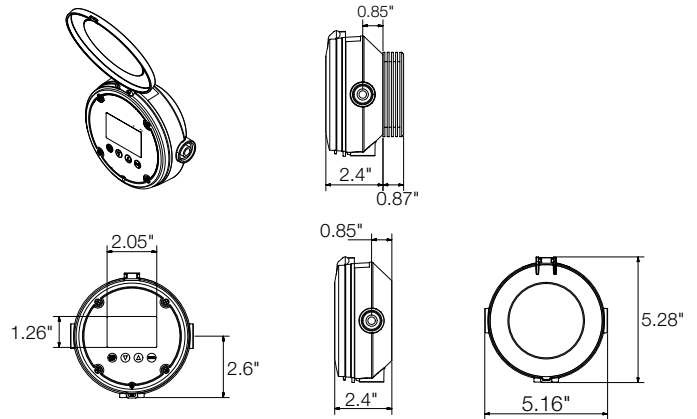

**Dimensions\* DON-1/2/3/4/8/9... (± 0.08")**

Model	A		B			C		
	Thread Connection	Flange Connection	Pulse Output	Zx/xA	Mechanical Totalizer M4	Pulse Output/Lx	Zx/xA	Mechanical Totalizer M4
DON-x04	2.67"	-	3.62"	5.16"	-	2.83"	5.28"	-
DON-x05	2.67"	-	3.62"	5.16"	-	2.83"	5.28"	-
DON-x10	2.67"	-	3.62"	5.16"	-	2.83"	5.28"	-
DON-x15	2.67"	-	3.89"	5.43"	-	2.83"	5.28"	-
DON-x20	4.33"	-	4.13" (3.98")	5.28" (5.12")	7.17" (7.01")	4.41"	5.28"	6.50"
DON-x25	6.93"	9.33"	5.36"	6.50"	7.64"	4.72"	5.28"	6.69"
DON-x30	7.40"	9.92"	6.54"	7.68"	8.78"	6.42"	6.42"	7.88"
DON-x35	8.34"	10.90"	6.77"	7.92"	9.61"	7.09"	7.09"	7.88"
DON-x40	8.34"	10.90"	9.69"	10.83"	11.77"	7.09"	7.09"	7.88"
DON-x45	10.50"	13.90"	9.13"	10.28"	11.18"	9.37"	9.37"	9.41"
DON-x50	11.60"	15.00"	9.02"	10.16"	11.89"	11.41"	11.41"	11.41"
DON-x55	11.60"	15.30"	10.80"	11.93"	13.66"	11.41"	11.41"	11.41"
DON-x60	12.60"	16.30"	13.80"	14.96"	16.70"	13.03"	13.03"	13.03"

\*Dimensions for DON-2/4/8/9... are specified in ( ) only when they are different from DON-1/3...



Oval Gear Flowmeter Model DON

DON with CT Electronics

