

Float Switches for liquids

NSM, NSP, NAB,
NEC, NST, NSE



- Easy to install
- Suited for universal use
- p_{max} : 15 bar; t_{max} : 150 °C
- Material:
PP, PTFE, stainless steel
- From density 0.5 kg/dm³



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com


Application

Liquid levels can be easily monitored with the following float switch types.

Level control schemes can be implemented with at least two floats, whereby one operates as minimum contactor, and the other as maximum contactor. The switches are suited for applications where magnetic level switches are unsuitable due to the danger of the float jamming with dirt particles or deposits.

Depending on the shape of the float and the material used, extremely aggressive, hot, soiled or pasty media can also be monitored with float switches.

Application Examples

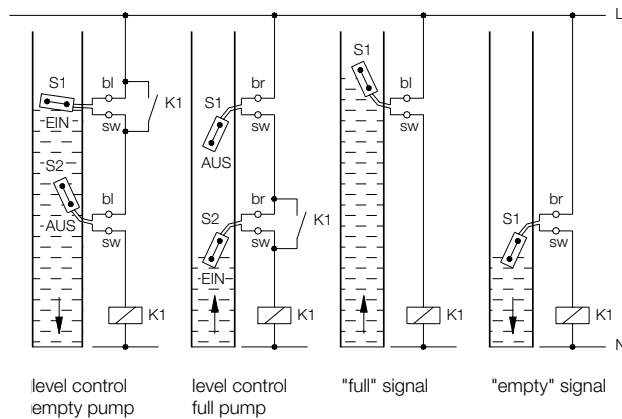

Description

The float comprises a hollow cylinder or a ball with integrated Reed contact or microswitch.

The switch is supplied as a changeover contact; it can be connected as a N/O contact or N/C contact as an option.

The contact switches when the liquid passes above or below the horizontal float position.

The switch point is set either by the side installation at the desired height, clamping at the desired level or when installed from the top weights attached to the cable.

Model Summary

Model NSM

Reasonably-priced design

Material: polypropylene
Contact: microswitch
Cable: Neoprene, silicone
Max. temperature: 95 °C
Max. pressure: 3 bar

Model NSP

Ball or cylinder shape

Material: polypropylene
Contact: microswitch
Cable: TPK, silicone, FEP
Max. temperature: 85 °C
Max. pressure: 2 bar

Model NAB

Reasonably-priced design

Material: polypropylene
Contact: microswitch
Cable: Neoprene
Max. temperature: 85 °C
Max. pressure: 3.5 bar

Model NEC

Multichamber, practically unsinkable

Material: polypropylene,
option Hypalon® coating
Contact: microswitch
Cable: Hypalon® coating
Max. temperature: 85 °C
Max. pressure: NEC: 3.5 bar
NEC-HY: 4 bar

Model NST...

For hot, aggressive media

Material: PTFE
Contact: Reed contact
Cable: PTFE or silicone with PTFE bellows
Max. temperature: 150 °C
Max. pressure: 1 bar

Model NSE

For hot, aggressive media

Material: stainless steel 1.4571
Contact: Reed contact
Cable: silicone with stainless steel armour
Max. temperature: 150 °C
Max. pressure: 15 bar


Contact protection relais

We recommend the use of contact protection relays with our float switches.

- isolates float switch from high voltages
- interval control for automatic filling or emptying of tanks


Model MSR 10: 1 changeover contact
Model MSR 20: 2 changeover contacts
Model MSR 11: 1 changeover contact, bi-stable

Model NSP...: Polypropylene

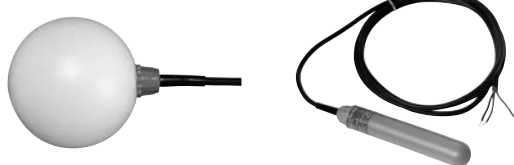


Application:	for liquids of all types; for example: soiled water, oil, weak acids or alkalis
Installation:	External, using a G 1 cable gland. The float can be introduced into open vessels from the top. The switch point is set using a weight.
Float material:	polypropylene
Cable:	standard 4 m TPK cable (3 x 0.75 mm ² , thermoplastic rubber) optional: silicone, FEP cable
Max. pressure:	Model NSP-S: 1 bar Model NSP-K: 2 bar
Max. temperature:	5... 60 °C (TPK cable) 5... 85 °C (silicone/FEP cable)
Density of medium:	Model NSP-S: >0.9 kg/dm ³ Model NSP-K: >0.6 kg/dm ³
Contact:	changeover contact, connectable as N/C or N/O contact
Switch capacity:	max. 250 V _{AC} / 150 V _{DC} , 300 VA, 60 W 1 mA... 1.5 A, 1 A at cos φ 0.7
Switch. Hysteresis:	approx. 25 mm (TPK), approx. 35 mm (FEP)
Switch angle:	approx. +12°/+3°
Protection:	IP 68

Dimensions [mm] NSP-S

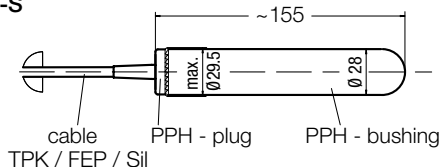

NSP-K

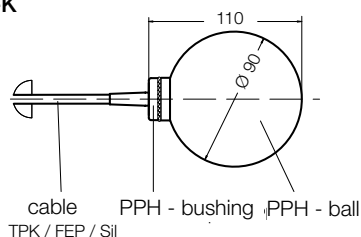

Minimum cable length*	
Cable type	Dimension X
TPK	70 mm
SIL	80 mm
FEP	110 mm


* Minimum cable length from the last fixing point

Model NSM...: Polypropylene



Application:	reasonably-priced float switch for liquids such as greases, solvents, weak acids and alkalis
Installation:	from the top in open vessels
Material:	float: polypropylene cable gland: polyamide
Cable:	standard: 2 m neoprene option: silicone
Max. pressure:	3 bar
Max. temperature:	60 °C neoprene 95 °C silicone cable
Density of medium:	>0.6 kg/dm ³
Contact:	microswitch, function changeover contact
Switch capacity:	max. 250 V _{AC} , max. 6 A, min. 100 mA
Protection:	IP 68
Hysteresis:	min. 140 mm, max. 500 mm
Switch angle:	± 45°

Dimensions [mm] NSM



Order Details (Example: NSM-02 NEO)

Model	Description
NSM-02 NEO	Standard: 2 m neoprene cable
NSM-YY SIL	Option: silicone cable

(Please specify cable length in writing)

Order Details (Example: NSP-S W 04TPK)

Model	Design	Contact	Cable
NSP-	S = Stem form K = Ball form	W = changeover contact	04TPK = 4 m TPK cable
			YYTPK = TPK cable, min. 2 m
			YYSIL = Silicone cable, min. 2 m
			YYFEP = FEP cable, min. 2 m

Order Details (Example: NSP-weights)

Model	Description
NSP-Beschwer	Bading weights
NSP-Anschl1PVC	PVC cable gland G 1
NSP-Anschl2PVC	PVC cable gland G 2
NSP-Anschl1MS	Brass cable gland G 1
NSP-Anschl1VA	St. steel cable gland G 1



Description

The KOBOLD level switch model NAB is ideally suited for the level monitoring of liquids and for direct pump control by means of a mechanical switch with very high switch capacity 20 (8) A at 250 V_{AC}.

The NAB comprises a stable plastic housing made of polypropylene (PP) with neoprene cable of optional 3 or 10 m of length.


Areas of Application

- Level control of liquids
- Empty monitoring
- Feed monitoring
- Direct pump control
- Low-cost version for OEM applications


Technical Details

Float material:	Polypropylene (PP)
Cable material:	Neoprene
Length of cable:	3 and 10 m
Max. temperature:	85 °C
Max. pressure:	3.5 bar
Medium density:	0.5 ... 1.15 kg/dm ³
Contact:	Microswitch, changeover contact
Switch capacity:	20 A at resistive load 8 A at inductive load
Power supply:	250 V _{AC} , 50 / 60 Hz
Weight:	approx. 1200 g for 10 m cable
Actuating angle:	110° (55° from the horizontal plane in both directions)
Protection:	IP 68 (cable ends may not be immersed under water at any time)
Optional:	Ballast weight: Loaded resin, 175 g or 250 g

Dimensions [mm]

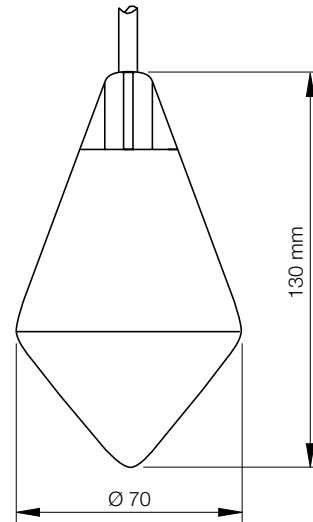

Electrical Connection

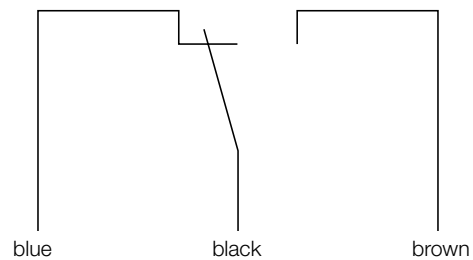

NKF



Do not use a cable tie that could damage the cable and damage the device. The NKF (cable clamp) is an accessory that allows you to properly attach the electric cable to the desired height without hurting the cable.

Order Details (Example: NAB-W03)

Model	Description
NAB-W03	Changeover contact, 3 m cable
NAB-W10	Changeover contact, 10 m cable

Accessories NAS/NAB

Model	Description	Image
NAS-NAB-BG250	Ballast weight, loaded resin, 250 g	
NKF	Cable clamp	

Description

The KOBOLD level switches of model NEC have been developed for level monitoring of liquids and for direct pump control for all industrial applications.

The float is supplied with a mechanical microswitch with very large switching capacity.

The NEC comprises a stable plastic housing made of polypropylene with a total of five cavities sealed back-to-back. The instruments are thus practically unsinkable even when physically damaged.

The level switches are available in following basic designs:

- NEC-930: polypropylene float with mechanical contact, 5 m Hypalon® cable
- NEC-HY930: float hypalon coated for aggressive media with mechanical contact, 5 m Hypalon® cable
- NEC-930N10: polypropylene float, with mechanical contact, 10 m Hypalon® cable




Technical Details


Float:	Double cone
Float material (standard model):	Polypropylene (PP)
Float material (HY model):	PP with Hypalon®-coating
Cable:	3 x 1 mm ² , Hypalon®
Contact:	microswitch, changeover contact 250 V _{AC} , 16 A resistive load, 6 A inductive load
Actuating angle:	± 25° from the horizontal
Medium density:	NEC: 0,7-1,15 kg/dm ³ NEC-HY: 0,8-1,10 kg/dm ³
Max. pressure:	NEC: 3.5 bar; NEC-HY: 4 bar
Max. temperature:	85 °C
Protection:	IP 68 (cable ends may not be immersed under water at any time)

All level switches of model NEC are supplied complete with ballast weight.

Dimensions [mm]

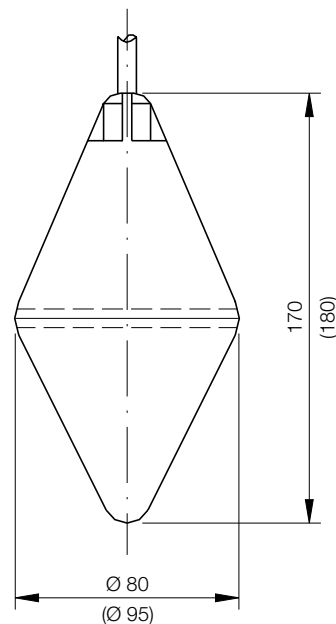

Electrical Connection

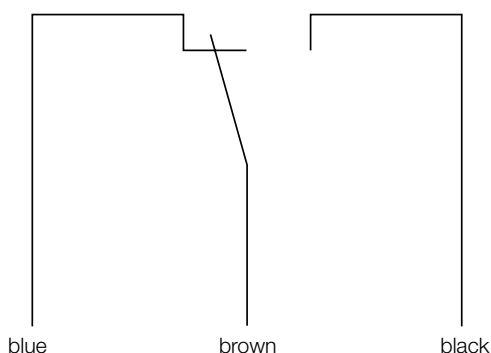

Order Details (Example: NEC-930)

Model	Float material / cable
NEC-930	= PP / 5 m Hypalon® cable
NEC-930N10	= PP / 10 m Hypalon® cable
NEC-HY930	= PP Hypalon® coated / 5 m Hypalon® cable

Accessories NEC

Model	Description	Image
NKF	Cable clamp	

Model NST...: PTFE



Application: for hot, extremely aggressive or dirty liquids

Installation: From inside with G 1/2 connection (model NST-B only) or from outside with G 2 connection

Float material: PTFE

Bellows: PTFE (model NST-B only)

Cable: Model NST-A: 2 m FEP cable
Model NST-B: 2 m silicone or FEP cable

Max. pressure: 1 bar

Max. temperature: 150 °C

Medium density: 0.79 kg/dm³

Contact: Reed contact, connectable as N/O or N/C


Switch capacity: 4...250 V_{AC/DC}
1 mA...1 A, 60 VA

Switch. Hysteresis: approx. 100 mm


Switch angle: +20° / -20°

Protection: IP 68

Dimensions [mm] NST-B

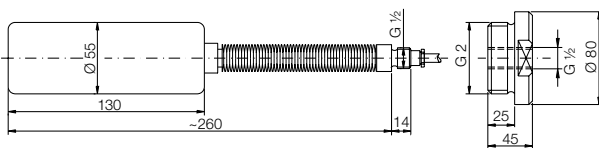

NST-A

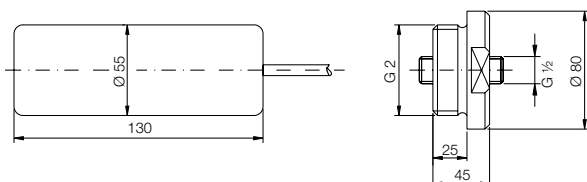

Order Details (Example: NST-AW 02 FEP)

Model	Description
NST-	AW 02 FEP = standard-design, 2 m FEP cable BW 02 FEP = PTFE bellows, 2 m FEP cable BW 02 SIL = PTFE bellows, 2 m SIL cable
NST-Anschl. R50A	PTFE cable gland, G 2, for standard design
NST-Anschl. R50B	PTFE cable gland, G 2, for bellows

Model NSE...: Stainless steel



Application: for very aggressive, pasty or hot liquids

Installation: from inside with G 1/2 connection or from outside with flange

Material: Float: stainless steel 1.4571
Armour: stainless steel 1.4404
Wire mesh: stainless steel 1.4301
Screw fitting: stainless steel 1.4571

Cable: 2 m silicone cable, 270 mm of which with st. steel armour, 1.4541

Max. pressure: NSE-D: 6 bar
NSE-K: 15 bar

Max. temperature: 150 °C

Medium density: >0.8 kg/dm³

Contact: Reed contact change-over connectable as N/O or N/C


Switch capacity: 4...250 V_{AC/DC}
1 mA...1 A, 60 VA

Switch. Hysteresis: approx. 100 mm


Switch angle: +20° / -20°

Protection: IP 68

Dimensions [mm] NSE-D

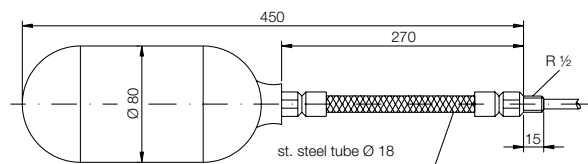

NSE-K

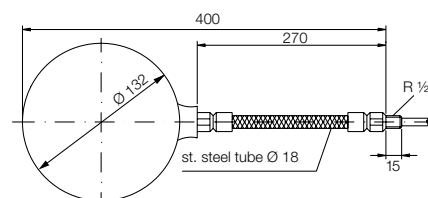

Order Details (Example: NSE-DW 02 SIL)

Model	Description
NSE-DW 02 SIL	Cylindrical float, 2 m silicone cable
NSE-KW 02 SIL	Ball float, 2 m silicone cable